

DOOR OPENING:

_____W x _____H

- DOUBLE - SINGLE

QUANTITY: _____

COLOR: _____

OPTIONS:

(CHECK BOX IF APPLICABLE)

- CUSTOM WINDOW SIZE

_____W x _____H


- STAINLESS STEEL GRAVITY ARM

- HOLD OPEN DEVICE


- WIDE ANGLE 270° HINGE

- EXTENSION "U" BRACKET

- VALANCE _____ H




"U" BRACKET



VALANCE

VALANCE HEIGHT

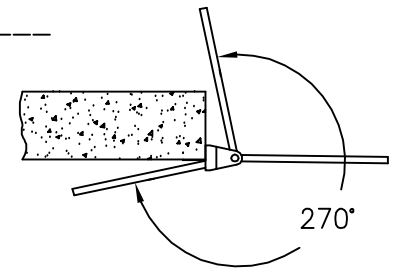

270° HINGE

LEGEND:

1. HINGE POCKET
2. STIFFENED BACK EDGE
3. STD. PVC WINDOW
4. 1/4" THICK ABS STIFFENERS

PANEL MATERIAL: 66oz. VINYL.

***** RECOMMENDED FRAMING REQUIREMENTS:**

1/8" THICK X 4" WIDE FACE STEEL FRAME MOUNTED TO A SOLID FOUNDATION

S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____


P/O No.: _____

DATE: _____



SERIES 2000 - F100
LITERATURE DRAWING

DATE: APR-27-18	SCALE: 1:20
DRAWN: OC,AS	DWG NO: L2000-G
APPROVED: ST	PART NO: N/A

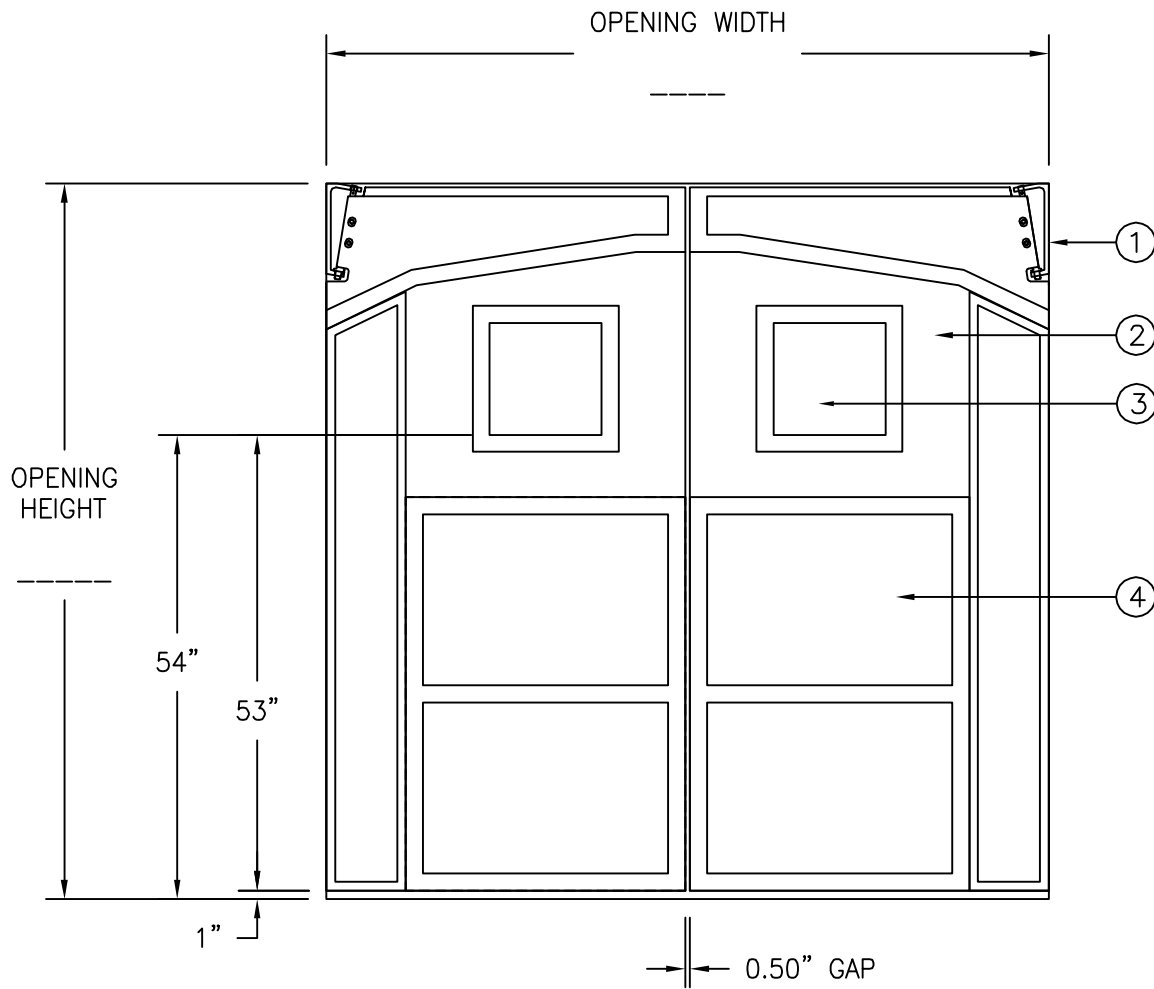

DOOR OPENING:

_____W x _____H

- DOUBLE - SINGLE

QUANTITY: _____

COLOR: _____

OPTIONS:

(CHECK BOX IF APPLICABLE)

- CUSTOM WINDOW SIZE

_____W x _____H


- STAINLESS STEEL GRAVITY ARM

- HOLD OPEN DEVICE


- WIDE ANGLE 270° HINGE

- EXTENSION "U" BRACKET

- VALANCE _____ H




"U" BRACKET



VALANCE

VALANCE HEIGHT

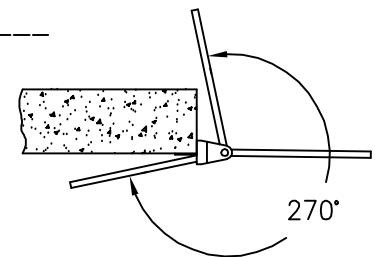

270° HINGE

LEGEND:

1. GRAVITY ARM ASSEMBLY
2. SINGLE LAYER OF FOOD GRADE APPROVED 2.4mm THICK MONOFILAMENT PVC.
3. 13 1/2" WIDE x 13" HIGH CLEAR PVC WINDOW
4. IMPACT PLATE-DOUBLE LAYER OF MONOFILAMENT HEAT SEALED

*** RECOMMENDED FRAMING REQUIREMENTS:

1/8" THICK X 4" WIDE FACE STEEL FRAME MOUNTED TO A SOLID FOUNDATION

S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____



P/O No.: _____

DATE: _____




SERIES 2000 - F200 LITERATURE
13"x13" WINDOW WITH NO OVERLAP

DATE: DEC-13-18	SCALE: 1:24
DRAWN: OC, AS	DWG NO: L2000-H / 1
APPROVED: ST	PART NO: N/A

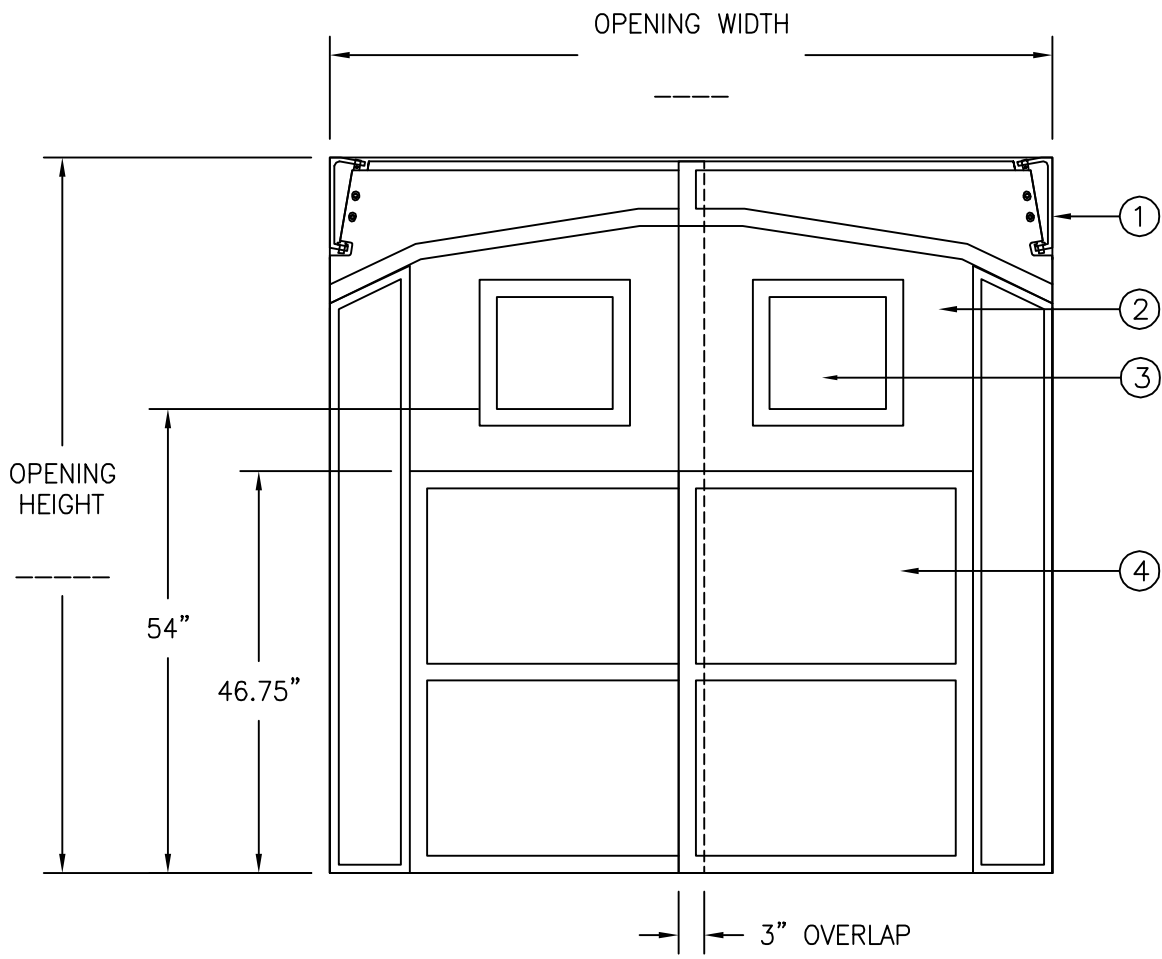


"U" BRACKET



VALANCE

VALANCE HEIGHT

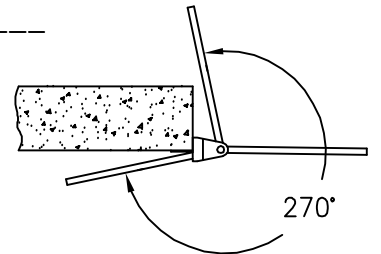

270° HINGE

DOOR OPENING:

_____W x _____H

- DOUBLE - SINGLE

QUANTITY: _____

COLOR: _____

OPTIONS:

(CHECK BOX IF APPLICABLE)

- CUSTOM WINDOW SIZE

_____W x _____H

- STAINLESS STEEL GRAVITY ARM

- HOLD OPEN DEVICE

- WIDE ANGLE 270° HINGE

- EXTENSION "U" BRACKET

- VALANCE _____ H

LEGEND:

1. GRAVITY ARM ASSEMBLY
2. SINGLE LAYER OF FOOD GRADE APPROVED 2.4mm THICK MONOFILAMENT PVC.
3. 13 1/2" WIDE x 13" HIGH CLEAR PVC WINDOW
4. IMPACT PLATE-DOUBLE LAYER OF MONOFILAMENT HEAT SEALED

*** RECOMMENDED FRAMING REQUIREMENTS:
 1/8" THICK X 4" WIDE FACE STEEL FRAME MOUNTED TO A SOLID FOUNDATION


S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____




P/O No.: _____

DATE: _____



SERIES 2000 - F200 LITERATURE
 13"x13" WINDOW WITH OVERLAP

DATE: DEC-13-18	SCALE: 1:24
DRAWN: OC, AS	DWG NO: L2000-H / 2
APPROVED: ST	PART NO: N/A

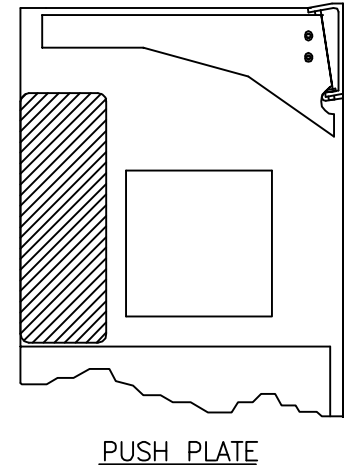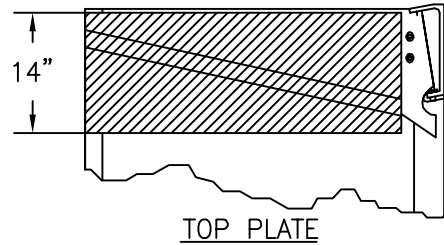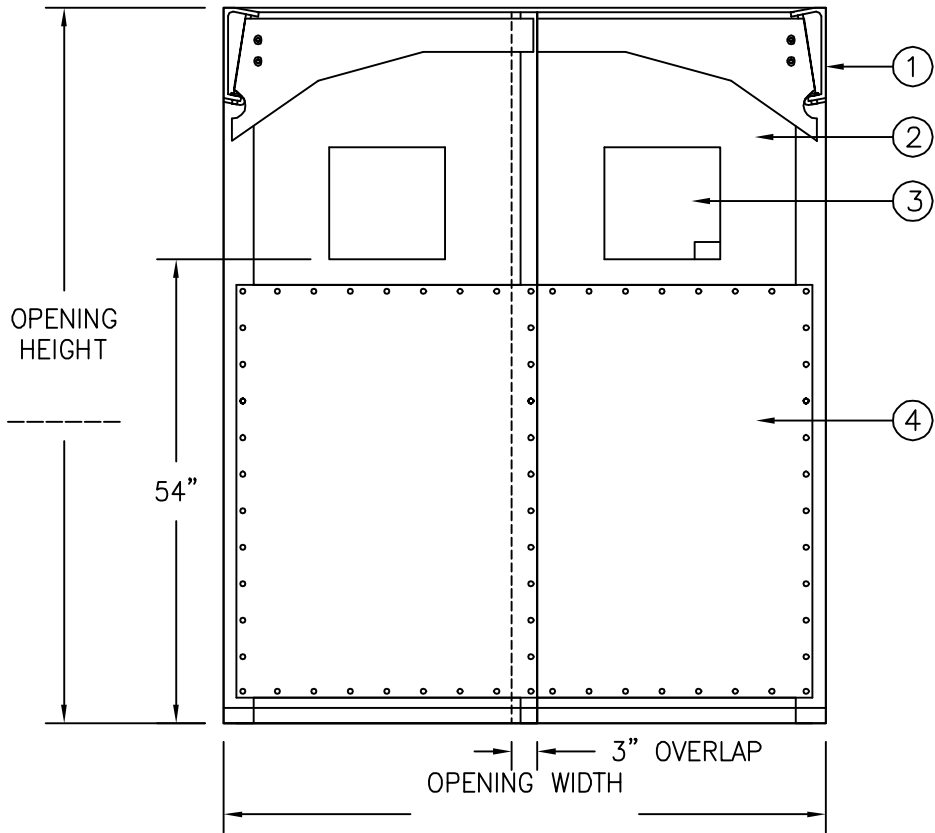

MODEL

R50 R100 R150

FABRIC COLOR: _____

DOOR OPENING:

_____ W x _____ H

DOUBLE SINGLE

QUANTITY: _____

OPTIONS
(CHECK BOX IF APPLICABLE)

- CUSTOM WINDOW SIZE
_____ W X _____ H

- STAINLESS STEEL GRAVITY ARM

- HOLD OPEN DEVICE

- WIDE ANGLE 270° HINGE

- TOP PLATE




- MIDDLE PLATE

- TOP & MIDDLE PLATE

- FULL KICKPLATE

- EXTENSION "U" BRACKETS

- VALANCE _____ H

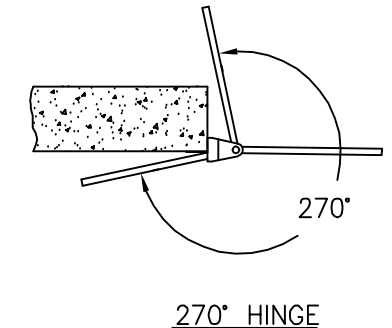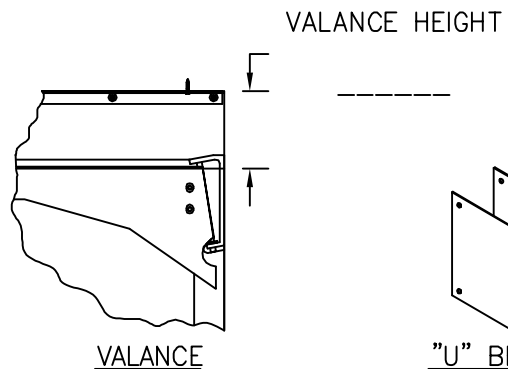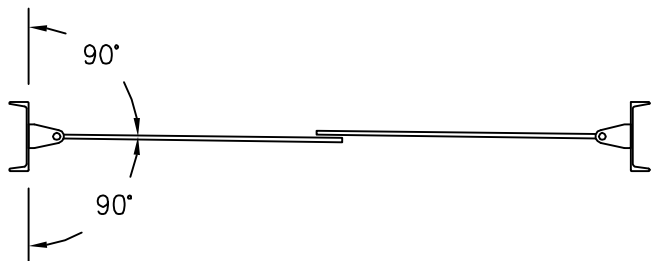

LEGEND:

1. GRAVITY ARM ASSEMBLY

2. SINGLE-PLY 40 oz. REINFORCED VINYL (R50), DOUBLE-PLY (R100) OR TRIPLE-PLY (R150) - R100 & R150 RECOMMENDED FOR DOOR OPENINGS OVER 8' WIDE x 8' HIGH

3. 13 1/2" WIDE x 13" HIGH CLEAR PVC WINDOW

4. 1/8" THICK x 48" HIGH BLACK HDP

*** RECOMMENDED FRAMING REQUIREMENTS:
1/8" THICK X 4" WIDE FACE STEEL FRAME MOUNTED TO A SOLID FOUNDATION

S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____



P/O No.: _____

DATE: _____


SUPER SEAL

SERIES 2000-MODELS R50, R100 & R150
RETAIL FLEXIBLE VINYL IMPACT DOORS


DATE: NOV-08-18	SCALE: 1:24
DRAWN: OC, AS	DWG NO: L2000-C / 1
APPROVED: RT, ST	PART NO: N/A

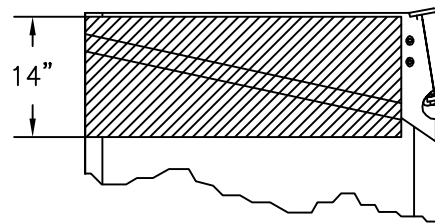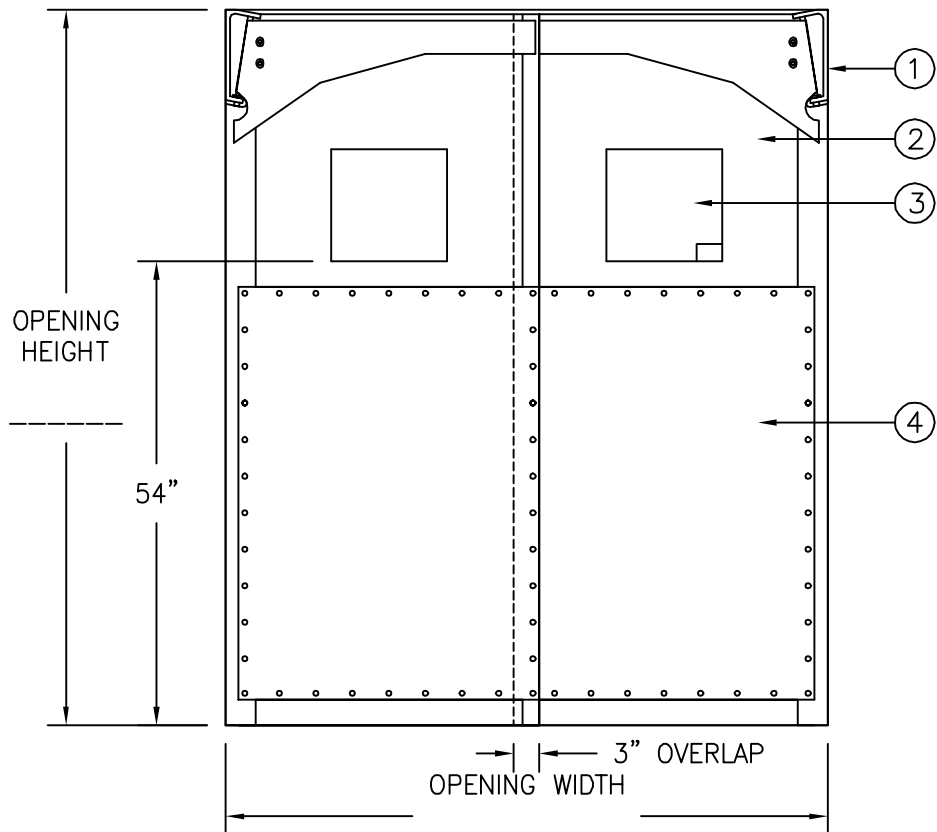

TOP PLATE

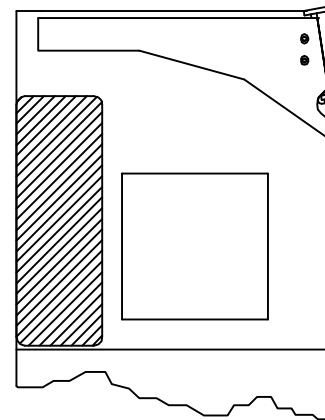

PUSH PLATE

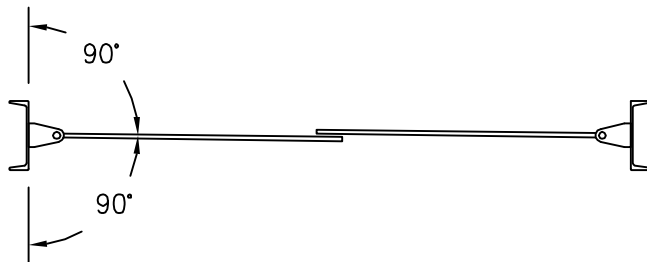


LEGEND:


1. GRAVITY ARM ASSEMBLY.
2. SINGLE-PLY 40 oz. REINFORCED VINYL (T50), DOUBLE-PLY (T100) OR TRIPLE-PLY (T150) - T100 & T150 RECOMMENDED FOR DOOR OPENINGS OVER 8' WIDE x 8' HIGH.
3. 13 1/2" WIDE x 13" HIGH CLEAR PVC WINDOW.
4. 1/8" THICK x 48" HIGH BLACK LOW-TEMP HDP

*** RECOMMENDED FRAMING REQUIREMENTS:
 1/8" THICK X 4" WIDE FACE STEEL FRAME MOUNTED TO A SOLID FOUNDATION


VALANCE HEIGHT



VALANCE



"U" BRACKET

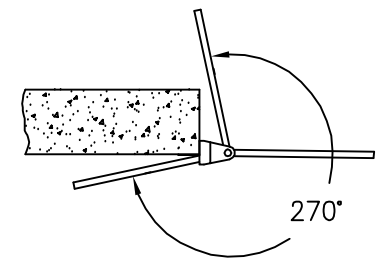

270° HINGE

MODEL

- T50 T100 T150

FABRIC COLOR: _____

DOOR OPENING:

_____ W x _____ H

- DOUBLE SINGLE

QUANTITY: _____

OPTIONS

(CHECK BOX IF APPLICABLE)

- CUSTOM WINDOW SIZE

_____ W X _____ H

- STAINLESS STEEL GRAVITY ARM

- HOLD OPEN DEVICE

- WIDE ANGLE 270° HINGE

- TOP PLATE

- MIDDLE PLATE

- TOP & MIDDLE PLATE

- FULL KICKPLATE

- EXTENSION "U" BRACKETS

- VALANCE _____ H

S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____



P/O No.: _____

DATE: _____




SERIES 2000—MODELS T50, T100 & T150
 THERMAL FLEXIBLE VINYL IMPACT DOORS

DATE: NOV-08-18	SCALE: 1:24
DRAWN: OC, AS	DWG NO: L2000-C / 2
APPROVED: RT, ST	PART NO: N/A

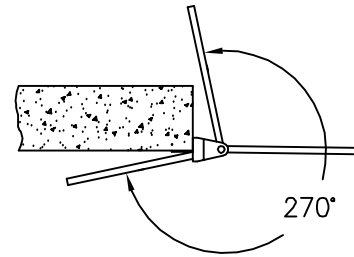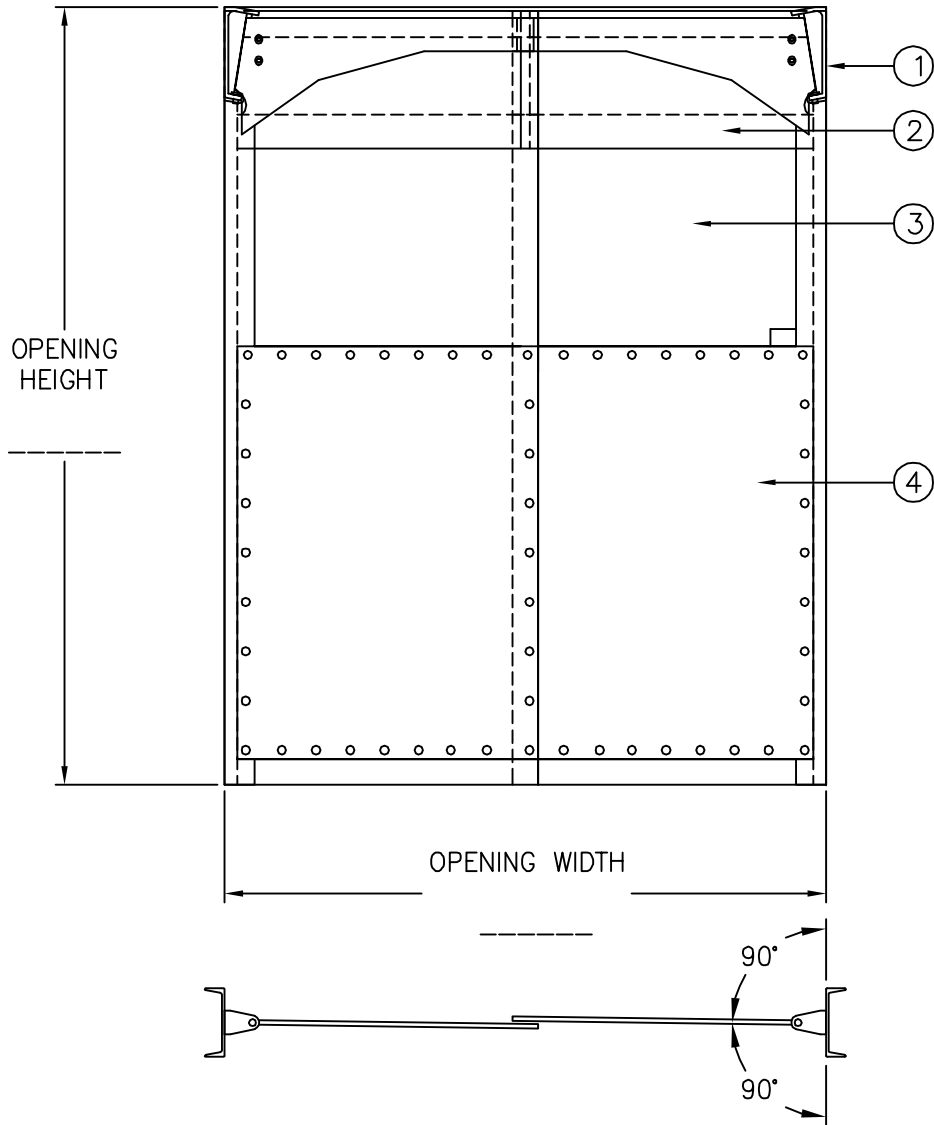

270° HINGE



"U" BRACKET

DOOR OPENING:

_____ W x _____ H

- DOUBLE - SINGLE

QUANTITY: _____

MODEL:

- C250 - C250LT

FABRIC COLOR: _____

OPTIONS:

(CHECK BOX IF APPLICABLE)

- STAINLESS STEEL GRAVITY ARM


- HOLD OPEN DEVICE

- WIDE ANGLE 270° HINGE

- EXTENSION "U" BRACKET

- VALANCE _____ H

- TOP PLATE

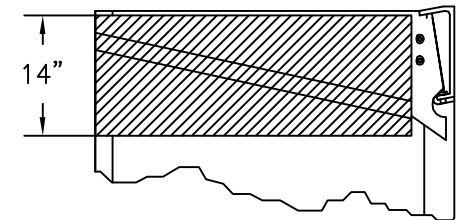

TOP PLATE

- 1 - GRAVITY SWING-ARM TOP HINGE ASSEMBLY
- 2 - SINGLE-PLY 40oz. REINFORCED VINYL
- 3 - 0.160" THICK STANDARD CLEAR PVC DOOR BODY (C250)
OR 0.160" THICK LOW-TEMP (C250LT)
(MODEL C250LT RECOMMENDED FOR COOLER APPLICATIONS)
- 4 - 1/8" THICK X 48" HIGH BLACK HDP (C250)
OR 3/16" THICK LOW-TEMP (C250LT)

*** RECOMMENDED FRAMING REQUIREMENTS:
1/8" THICK X 4" WIDE FACE STEEL FRAME MOUNTED TO A SOLID FOUNDATION

S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____

P/O No.: _____

DATE: _____



SERIES 2000-MODELS C250 & C250LT
CLEAR VIEW FLEXIBLE PVC IMPACT DOORS

DATE: JAN-22-18	SCALE: 1:24
DRAWN: GK, OC, AS	DWG NO: L2000-D
APPROVED: ST	PART NO: N/A