

## Roller Curtain

### INSTALLATION INSTRUCTIONS

**READ ALL INSTRUCTIONS BEFORE INSTALLING TORSION SPRING ASSEMBLY. SUPER SEAL MFG. LTD. WILL NOT BE HELD RESPONSIBLE FOR IMPROPER TENSION TO THE TORSION SPRING ASSEMBLY THAT MAY RESULT IN PREMATURE PRODUCT WEAR, PRODUCT FAILURE, PROPERTY DAMAGE, OR PERSONAL INJURY.**

#### 1. Apply Tension to Torsion Spring

##### a. Attach Curtain to unit.

- Attach Spring tube to Lift table using Screws and brackets. Brackets can be inserted facing in or out. The tub can be above or below.
- Use Screws through grommets to attach edge of curtain to lift table.

##### b. Apply tension to the small shaft.

- Turn Small Spring Tube to rewrap the Curtain around the Larger outer tube.
- Insert screwdriver into hole at end of small shaft.
- Complete enough full turns of small shaft to ensure the curtain will fully retract.
  - \* Wind shaft in direction noted on Shaft Winding Sticker.
  - \* Use alternating screwdrivers.
- Secure screwdriver.
- Insert Spring Retaining Bolt and tighten.

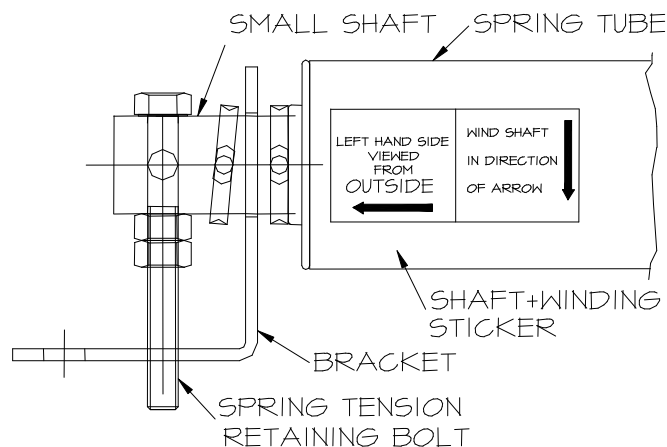


FIG.2

**DANGER! Always use extreme caution when adjusting Torsion Spring tension.**