



1. TOP HINGE ASSEMBLY
2. BOTTOM HINGE ASSEMBLY
3. ALUMINUM CLAD
4. 9" WIDE x 14" HIGH CLEAR SAFETY ACRYLIC WINDOW
5. 3/4" THICK EXTERIOR GRADE PLYWOOD CORE
6. 18 GALV. STEEL KICK PLATES (SEE OPTIONS)
7. GALVANIZED OR STAINLESS STEEL TRIM


\*\*\* RECOMMENDED FRAMING REQUIREMENTS:  
 1/8" THICK x 4" WIDE FACE STEEL FRAME MOUNTED  
 TO A SOLID FOUNDATION.

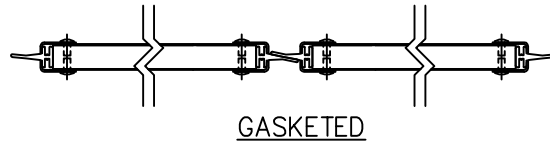

GASKETED

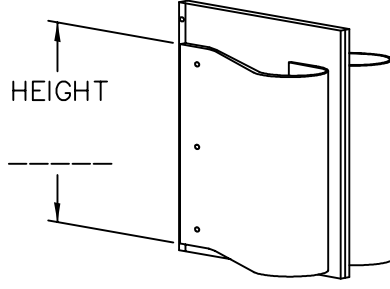

SPRING BUMPER

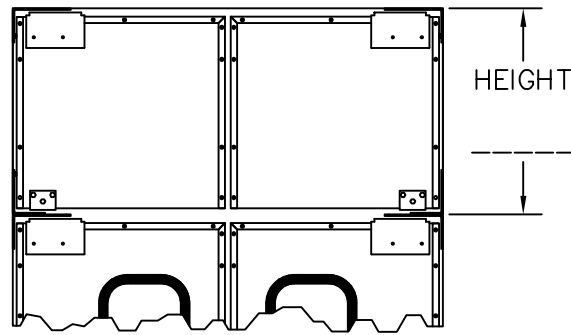

DOUBLE DUTCH

**DOOR OPENING:**

----- W ----- H

QUANTITY: -----

- DOUBLE
- SINGLE
  - LEFT
  - RIGHT
- KICK PLATES
  - SELECT HEIGHT
    - 18"
    - 24"
    - 36"
    - FULL HEIGHT
  - METAL SELECTION (FRONT/BACK)
    - GALV. STEEL/GALV. STEEL (SS1)
    - STAINLESS STEEL/GALV. STEEL (SS2)
    - GALV. STEEL/STAINLESS STEEL (SS2)
    - STAINLESS STEEL/STAINLESS STEEL (SS3)

**OPTIONS (CHECK BOX IF APPLICABLE)**

- GASKETED
- 5/16" THICK HDP SPRING BUMPERS  
 (KICKPLATE REMAINS BEHIND BUMPER)
  - SELECT HEIGHT
    - 12"
    - 21"
    - 42"
- CUSTOM WINDOW DESIGN
  - RECTANGULAR/SQUARE
    - W ----- H
  - ROUND - DIAMETER: -----
- 9" JAMB GUARDS
- CART GUARD
- CHAIN LOCKING COLLAR
- DOUBLE DUTCH

S.S. QUOTE REF. # \_\_\_\_\_

CUSTOMER \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

P/O No.: \_\_\_\_\_

DATE: \_\_\_\_\_



SERIES 1000 - MODEL SS1, SS2, SS3  
 NON-GASKETED WOOD CORE DOOR

DATE: FEB-24-20	SCALE: N.T.S.
DRAWN: OC, AS	DWG NO: LSS1, SS2, SS3
APPROVED: ST	PART NO: N/A