



SPRING BUMPER

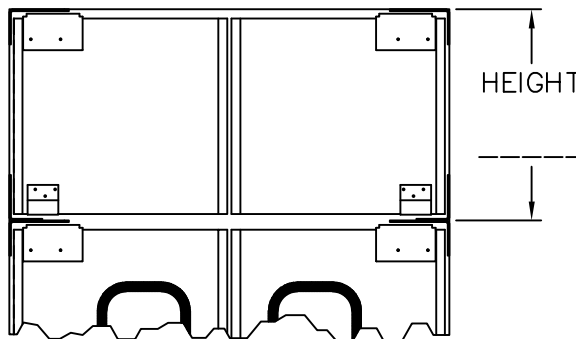

DOUBLE DUTCH

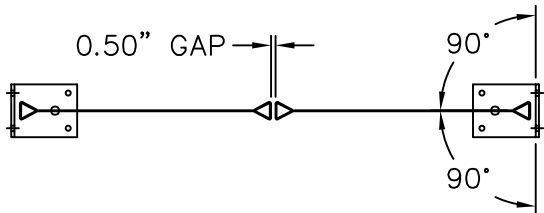

1. TOP HINGE ASSEMBLY
2. BOTTOM HINGE ASSEMBLY
3. 0.064" THICK ANODIZED ALUMINUM SATIN FINISH PANELS
4. 9" WIDE x 14" HIGH CLEAR SAFETY ACRYLIC WINDOW

*** RECOMMENDED FRAMING REQUIREMENTS:
 1/8" THICK x 4" WIDE FACE STEEL FRAME MOUNTED
 TO A SOLID FOUNDATION.

DOOR OPENING:

_____W x _____H

- DOUBLE
- SINGLE - LEFT RIGHT

QUANTITY: _____

OPTIONS (CHECK BOX IF APPLICABLE)

- LAMINATE CLADDING
- FRONT ONLY
- FRONT & BACK
- BACK ONLY

BRAND: _____

COLOR: _____

MFR'S #: _____

- 5/16" THICK HDP SPRING BUMPERS
 (HEIGHTS: 12", 21" & 42")

- CUSTOM WINDOW DESIGN

RECTANGLE/SQUARE:
 _____W _____H

ROUND - DIAMETER: _____

- 9" JAMB GUARDS

- KICK PLATES

(SELECT HEIGHT)

- 12" 24" 36" 48"

METAL SELECTION (FRONT/BACK)

- STAINLESS STEEL/STAINLESS STEEL
- STAINLESS STEEL/GALV. STEEL
- GALV. STEEL/STAINLESS STEEL
- GALV. STEEL/GALV. STEEL

- CART GUARD - _____ HIGH

- CHAIN LOCKING COLLAR

- PUSH PLATE

- DOUBLE DUTCH

S.S. QUOTE REF. # _____

CUSTOMER _____

APPROVED BY: _____

P/O No.: _____

DATE: _____



SERIES 1000 - MODEL SS6
 DELTA EDGE ALUMINUM DOOR

DATE: OCT-02-18	SCALE: N.T.S.
DRAWN: OC, AS	DWG NO: LSS6
APPROVED: ST	PART NO: N/A