



1. TOP HINGE ASSEMBLY
2. BOTTOM HINGE ASSEMBLY
3. ALUMINUM COVER PANEL
4. 9" WIDE x 14" HIGH CLEAR SAFETY ACRYLIC WINDOW
5. 18 ga. STEEL KICK PLATES (SEE OPTIONS)
6. 3/4" THICK EXTERIOR GRADE PLYWOOD OUTER CORE
7. 1/2" INSULATING FOAM INNER CORE
8. GALVANIZED OR STAINLESS STEEL TRIM (TO MATCH KICK PLATE)  
& REPLACEABLE RUBBER GASKETING

\*\*\* RECOMMENDED FRAMING REQUIREMENTS:  
1/8" THICK x 4" WIDE FACE STEEL FRAME MOUNTED  
TO A SOLID FOUNDATION.

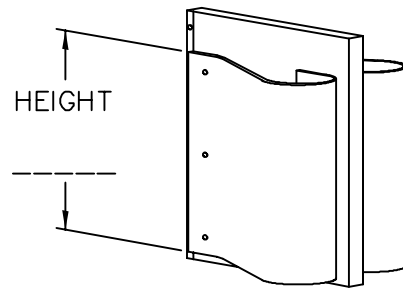

SPRING BUMPER

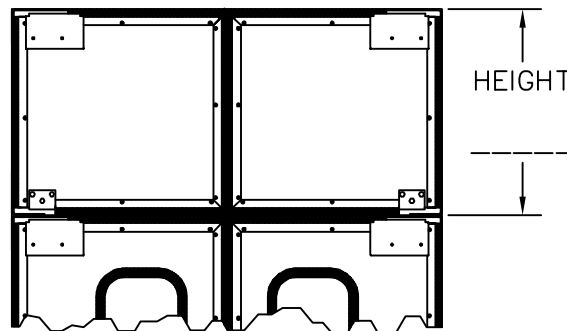

DOUBLE DUTCH

**DOOR OPENING:**

\_\_\_\_\_ W \_\_\_\_\_ H

QUANTITY: \_\_\_\_\_

- DOUBLE
- SINGLE
  - LEFT
  - RIGHT

**OPTIONS (CHECK BOX IF APPLICABLE)**

- 5/16" THICK HDP SPRING BUMPERS  
SELECT HEIGHT
  - 12"
  - 21"
  - 42"

- CUSTOM WINDOW DESIGN
  - RECTANGULAR/SQUARE

\_\_\_\_\_ W \_\_\_\_\_ H

- ROUND - DIAMETER: \_\_\_\_\_

- 9" JAMB GUARDS

- KICK PLATES  
SELECT HEIGHT
  - 24"
  - 36"
  - 48"
  - FULL HEIGHT
 METAL SELECTION (FRONT/BACK)
  - STAINLESS STEEL/STAINLESS STEEL
  - STAINLESS STEEL/GALV. STEEL
  - GALV. STEEL/STAINLESS STEEL
  - GALV. STEEL/GALV. STEEL

- CART GUARD
- CHAIN LOCKING COLLAR
- DOUBLE DUTCH

S.S. QUOTE REF. # \_\_\_\_\_

CUSTOMER \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

P/O No.: \_\_\_\_\_

DATE: \_\_\_\_\_



SERIES 1000 - MODEL SS7  
GASKETED & INSULATED WOOD CORE DOOR

DATE: OCT-02-18	SCALE: N.T.S.
DRAWN: OC, AS	DWG NO: LSS7
APPROVED: ST	PART NO: N/A